


LED800 Framing Shutter Moving Head Light-4in1

Spectrix 8 Pro

FRAMING LIGHTS

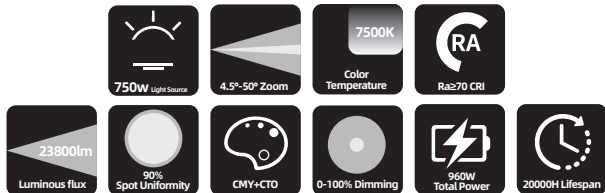

▶ OPTICAL SYSTEM

- Power Supply: 100-240V, 50/60Hz
- Power: 960W (220V), power factor: PF ≥0.98
- Light source: 750W LED module (lifespans: ≥20000h)
- Color temperature: 7500K
- CRI: Standard: 70+, HCRI: 95+

▶ MAIN FEATURE

- Linear CMY color mixing
- Linear CTO (6500K-3200K)
- Fixed color wheel with 6 dichroic colors + White
- 1 fixed gobo wheel with 8 gobos + Open
- 1 rotating gobo wheel with 6 replaceable gobos + Open
- 1 effect wheel
- Prism: Rotating 4-facet circular prism & Inline 6-prism
- Frost filters: 2 separate (light and medium)
- Electronic Dimming: 0-100%
- Iris: Motorized iris
- Framing : 4 blades with +/- 45° rotation of the full system
- Zoom: 4.5° - 50°
- Pan/Tilt: 540°/270°, 16bit precision scanning, Pan & Tilt lock
- Strobe: 1-25 times/sec
- Noise Mode: Auto Mode, Theater Mode, Silent Mode

▶ OPERATING

- Protection level: IP20
- Working Environment: -10C°- 45C°

▶ CONTROL

- DMX channel: 37/53 CH
- Art-net, RDM and wireless DMX512 control (optional)
- Signal input/output: 5pins & 3pins XLR, RJ45 interface
- Power: Seetronic TRUE1 Power input

▶ MEASUREMENT

- Product Size: 728*380*282mm
- Net weight: 31.8kg

COLOR WHEEL



FIXED GOBO WHEEL



ROTATING GOBO WHEEL




FRAMING



EFFECT WHEEL



ILLUMINANCE

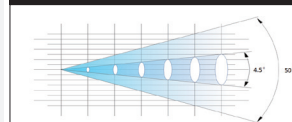

| Distance(m) | 0 | 5 | 10 | 15 | 20 |
|-----------------|---|-------|-------|-------|-------|
| 4.5°Lumen(lux) | 0 | 49254 | 11817 | 5508 | 3099 |
| 4.5°Diameter(m) | 0 | 0.40 | 0.78 | 1.19 | 1.58 |
| 50°Lumen(lux) | 0 | 1230 | 385 | 227 | 145 |
| 50°Diameter(m) | 0 | 4.09 | 8.40 | 14.01 | 18.69 |

