

LED PAR (Four Colour)

Light Manual



User manual

Please read the instructions carefully before use

TABLE OF CONTENTS

1. Safety Instructions	3
2. Technical Specifications	5
3. How To Control The Unit	5
4. SHAPE.....	6
5. Trouble shooting	7
6. Fixture Cleaning	8

statement

The product has good capability and intact packaging when it leaves the factory. All users should comply with the warning items and manual. Any misuse causing damage is not included in our guarantee, and we also cannot be held responsible for any malfunction or problem owing to ignoring the manual.

1. Safety Instructions

Please keep this User Guide for future consultation. If you sell the unit to another user, be sure that they also receive this instruction booklet.

- ⚠️ Unpack and check carefully that there is no transportation damage before using the unit.
- ⚠️ Before operating, ensure that the voltage and frequency of the power supply match the power requirements of the unit.
- ⚠️ It's important to ground the yellow/green conductor to earth in order to avoid electric shock.
- ⚠️ The unit must be installed in a location with adequate ventilation, at least 50 cm from adjacent surfaces. Be sure that no ventilation slots are blocked.
- ⚠️ Disconnect main power before replacement or servicing.
- ⚠️ Make sure there are no flammable materials close to the unit while operating, as it is a fire hazard.
- ⚠️ Use a safety cable when fixing this unit. DO NOT handle the unit by taking its head only, but always by taking its base.
- ⚠️ Maximum ambient temperature: 40°C. DO NOT operate it where the temperature is higher than this. Unit surface temperature may reach up to 85°C. DO NOT touch the housing with bare hands during its operation. Turn off the power and allow about 15 minutes for the unit to cool down before replacing or serving.
- ⚠️ In the event of a serious operating problem, stop using the unit immediately. Never try to repair the unit by yourself. Repairs carried out by unskilled people can lead to damage or malfunction. Please contact the nearest authorized technical assistance center. Always use the same type of spare parts.
- ⚠️ DO NOT touch any wire during operation as high voltage might cause electric shock.

Warning:

- ⚠️ To prevent or reduce the risk of electrical shock or fire, do not expose the unit to

rain or moisture.

- ⚠ DO NOT open the unit within five minutes after switching it off.
- ⚠ The housing, the lenses, or the ultraviolet filter must be replaced if they are visibly damaged.

Caution:

There are no user-serviceable parts inside the unit. DO NOT open the housing or attempt any repairs yourself. In the unlikely event your unit may require service, please contact your nearest dealer.

Installation:

The unit should be mounted via its screw holes on the bracket. Always ensure that the unit is firmly fixed to avoid vibration and slipping while operating. And make sure that the structure to which you are attaching the unit is secure and is able to support a weight of 10 times of the unit's weight. Also always use a safety cable that can hold 12 times of the weight of the unit when installing the fixture.

The equipment must be fixed by professionals. And it must be fixed at a place where is out of the touch of people and has no one pass by or under it.

2. Technical Specifications

Light Sources: LED 18*15W 4-in-1

Power Consumption: 180W

Zoom Angle: 25°

Power Voltage: AC100-240V, 50/60Hz

Dimensions: 350*230*285mm

Net Weight: 7kg

Gross Weight: 8kg

Control

DMX Channel: 8 Channel

Control Modes: DMX512

Construction

Display: Digital Display Panel

Data In/Out socket: 3-pin

Protection Rating: IP65

3. How To Control The Unit

The DMX512 is widely used in intelligent lighting control, with a DMX 512 controller. Connect several lights together, DMX in and DMX out, 3-pin XLR connectors: Pin 1: GND, Pin 2: Negative signal (-), Pin 3: Positive signal (+)

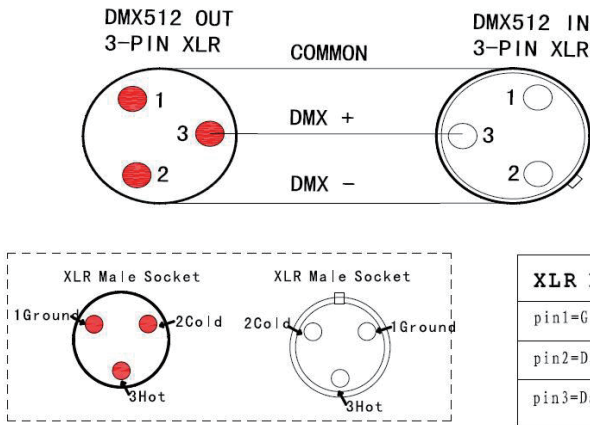


Figure2

Display:


- MENU To select the programming functions
- DOWN To go backward in the selected functions
- UP To go forward in the selected functions
- ENTER To confirm the selected functions

SetDMX Address Code

- 1 Press **"Menu"** to "Set DMX Address", and press the **"ENTER"** key to enter.
- 2 Show **"Set DMX Address DMX Address:001"**. Press the **"UP and DOWN"** keys to amend.
- 3 Press **"ENTER"** key to save and exit. Pressing the **"MENU"** key does not save and exit.

○ ○ ○ ○
Menu Up Down Enter

1. Graphic part:



- A. Function Key
- B. Add Key
- C. Minus Key
- D. Enter Key

LED Display Window

The operating instructions: According to the function keys, A will cycle through eight different function effects. The digital tube top two numbers represent the current function (see table). After two numbers represent the function in the address or speed, parameters. According to B or C keys, you can change the parameters. Press the D key to confirm.

2. LED Display Window Function CRT (All of the selected press again according to the function D key confirmation)

Number	display	Function Explain
NO.1	D0001	eight channels address (001-512) B.C. add minus address
NO.2	CC00	eight channels address(01-99) B.C. modify jump to change speed
NO.3	CP00	Seven color gradient (01-99) B.C. gradient to change speed
NO.4	DE00	Seven color combination change
NO.5	BE00	Seven color sonic change
NO.6	R220	Choosing colors red, B.C. modify choice
NO.7	G220	Choosing colors green, B.C. modify choice

NO.8	B220	Choosing colors blue, B.C. modify choice
NO.9	W220	Choosing colors White, B.C. modify choice

3.DMX 512 Channels Explain

channels number	Function	Explain
NO.1	Total dimming	RGBW total dimming, from dark to bright
NO.2	Total strobe	RGBW total strobe, from slow to fast
NO.3	Function choose	0—50: DMX 8-channel controller; 51 — 100: jump; 101 — 150: gradient; 151 — 200: pulse change; 201—255: sound control
NO.4	Function speed	Function speed, from slow to fast
NO.5	R Dimming	R Dimming, from dark to bright
NO.6	G Dimming	G Dimming, from dark to bright
NO.7	B Dimming	B Dimming, from dark to bright
NO.8	W Dimming	W Dimming, from dark to bright

4. Troubleshooting

Following are a few common problems that may occur during operation. Here are some suggestions for easy troubleshooting:

A. The unit does not work, no light and the fan does not work

1. Check the connection of power and main fuse.
2. Measure the mains voltage on the main connector.
3. Check the power on LED.

B. Not responding to DMX controller

1. DMX LED should be on. If not, check DMX connectors, cables to see if link properly.
2. If the DMX LED is on and no response to the channel, check the address settings and DMX polarity.
3. If you have intermittent DMX signal problems, check the pins on connectors or on PCB of the unit or the previous one.
4. Try to use another DMX controller.
5. Check if the DMX cables run near or run alongside to high voltage cables that may cause damage or interference to DMX interface circuit.

C. One of the channels is not working well

1. The stepper motor might be damaged or the cable connected to the PCB is broken.
2. The motor's drive IC on the PCB might be out of condition.

5. Fixture Cleaning

The cleaning of internal and external optical lenses and/or mirrors must be carried out periodically to optimize light output. Cleaning frequency depends on the environment in which the fixture operates: damp, smoky, or particularly dirty surroundings can cause greater accumulation of dirt on the unit's optics.

- **Clean with a soft cloth using normal glass cleaning fluid.**
- **Always dry the parts carefully.**
- **Clean the external optics at least every 20 days. Clean the internal optics at least every 30/60 days.**